

# I-110




The Terex Finlay I-110 tracked impact crusher has been specifically designed for quarrying, mining, recycling and demolition applications. The Terex Finlay I-110 features a  $\text{Ø}1000\text{mm} \times 1000\text{mm}$  ( $\text{Ø}40'' \times 40''$ ) hydrostatic drive impact chamber with variable rotor speed. The advanced electronic control system monitors and controls the speed of the rotor and regulates the VGF with integrated pre-screen to maintain a consistent feed of material into the impact chamber while maintaining optimal crushing capacity. The machine provides operators high material reduction ratios and produces a consistent product shape.

## Features:

- ▶ Fully hydraulic assisted apron setting features makes adjustment of the aprons convenient and efficient.
- ▶ Heavy duty vibrating feeder (VGF) with integral pre-screen removes dirt fines and sizes bypass material for reprocessing.
- ▶ Under crusher vibratory plate feeder with wear resistant liners aids material discharge flow and reduces under crusher blockages.
- ▶ Crusher chamber is supplied with a 4 bar rotor as standard with a 3 bar rotor available as an option.

## Transport Dimensions

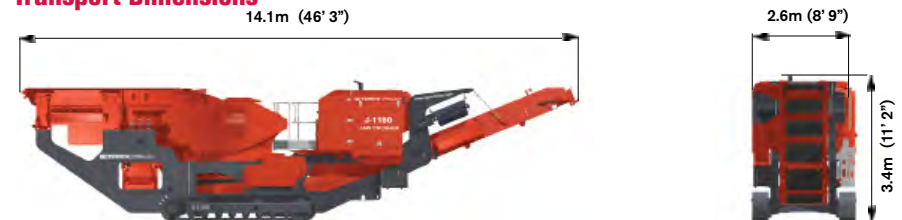

## Working Dimensions



Machine Weight: 33,500kg (73,854lbs) (without by-pass conveyor and magnet options)  
36,000kg (79,365lbs) (with by-pass conveyor and magnet options)



TEREX® | FINLAY



# Impact Crusher I-110